

NMR 60/45-150



AUSTRALIA'S TOP SELLING TRUCK BRAND SINCE 1989.

AT A GLANCE

GVM 6,000 / 4,500 kg GCM (with M/T) 9,500 / 8,000 kg GCM (with AMT) 8,000 kg

110 kW @ 2,800 rpm Power

375 Nm @ 1,600 - 2,800 rpm **Torque**

OPTIONS

Automated Manual Transmission (AMT) model:

includes AMT

ADVANCED TECHNOLOGY

Emissions: Euro V / ADR 80/03 Meets EEV emissions standard Driver and passenger airbag with seatbelt pretensioner

ECE-R29 compliant cab

Anti-lock Braking System (ABS) Stability Control System (IESC)

Anti Skid Regulator (ASR)

Hill Assist - except with AMT

Electric mirrors Cruise control

Independent front coil suspension

Cornering lamps





DRIVELINE AND CHASSIS SPECIFICATIONS

ENGINE: ISUZU 4JJ1-TCS

Type: 4 cylinder 16 valve with chain driven DOHC

Displacement: 2,999 cc **Compression ratio:** 17.5:1

Bore x Stroke: 95.4 mm x 104.9 mm

 $\textbf{Max power (DIN-NET):} \quad 110 \text{ kW (148 HP)} @ 2,800 \text{ RPM}$

(JIS Gross): 114 kW (153 HP) @ 2,800 RPM

Max torque (DIN-NET): 375 Nm (277 lb.ft) @ 1,600 - 2,800 RPM (JIS Gross): 388 Nm (286 lb.ft) @ 1,600 - 2,800 RPM

Induction system: Electronically controlled variable nozzle turbocharger

with air-to-air intercooler.

Fuel injection: Direct injection high pressure common rail system.

Emission control system: Cooled EGR with exhaust Diesel Particulate

Diffuser (DPD). ADR 80/03 (Euro V) compliant.

EEV compliant.

CLUTCH

Standard model:

- Auto adjusting hydraulic control with vacuum assistance. Single plate 300 mm diameter.
- Total lining area: 847 cm²

With AMT:

 Fully automated hydraulically controlled wet clutch and torque convertor with lock up.

TRANSMISSION

Standard model:

ISUZU MYY-5T

- 5 speed manual. Syncromesh on gears 1-5.
- PTO provision on LHS of transmission case. PTO drive from counter gear.

• Gear ratios (:1)

 1st
 2nd
 3rd
 4th
 5th
 Rev

 5.315
 3.053
 1.655
 1.000
 0.721
 5.068

With AMT:

ISUZU MYY-6E

- 6 speed Automated Manual Transmission (AMT) with both fully automatic and clutchless manual operation modes.
- PTO provision on LHS of transmission case. PTO drive from counter gear.

• Gear ratios (:1)

 1st
 2nd
 3rd
 4th
 5th
 6th
 Rev

 5.979
 3.434
 2.040
 1.379
 1.000
 0.750
 5.701

AXLES

Front: Isuzu Fl026

· Fully independent wishbone. 2,600 kg capacity.

Rear: Isuzu R060

- Full floating Banjo type. Four differential pinions. 5,000kg capacity.
- Drive ratio: 5:125:1 (Standard model), 4:300:1 (with AMT).


SUSPENSION

Front:

- · Coil springs.
- Double acting hydraulic shock absorbers.

Rea

- Multi-leaf main, taper leaf helper spring.
- Double acting hydraulic shock absorbers.

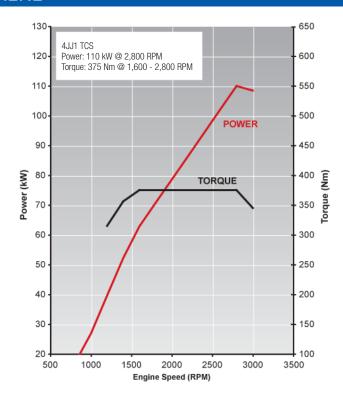

BRAKES

- Auto adjusting front and rear disc brakes with dual circuit hydraulic control, vacuum assistance and electronic brake force distribution (EBD).
- · ABS, ASR traction control, IESC stability control.
- Hill Assist except with AMT.
- · Front disc diameter: 293 mm
- Rear disc diameter: 293 mm
- 190 mm diameter drum park brake mounted on rear of transmission.
- Vacuum controlled exhaust brake.

STEERING

- · Power assisted rack and pinion.
- Turns lock to lock: 4.2
- Maximum angle: 38.00° (inside wheel) / 35.75° (outside wheel)

WHEELS AND TYRES

- 16 x 5.5J five stud steel wheels.
- 195/85R16 114/112L Michelin XJE4 Mix Energy Tubeless.
- · Maximum tyre rating:

Steer axle: 2,360 kg Drive axle: 4,480 kg

• 1 frame mounted spare wheel and tyre assembly.

CHASSIS FRAME

- Cold rivetted ladder frame. SAPH440 weldable steel sidemembers.
- Frame dimensions:

Side rail (mm): 180 x 65 x 4.0 Rear frame width (mm): 700

FUEL TANK

- Frame mounted steel fuel tank. 75L (short w/base), 100L (medium w/base).
- · Lockable fuel cap.

ELECTRICAL SYSTEM

- 24 volt electrical system.
- 90 amp alternator.
- 4.0 kW starter motor.
- 2 x 80D26L (630 CCA) batteries connected in series.

CABIN SPECIFICATIONS AND APPOINTMENTS

CAB EXTERIOR

- All steel construction. High tensile steel used for cab underframe.
 Manual cab tilt to 45° with torsion bar assistance.
- · Complies with ECE-R29 cab strength standard.
- Heavy duty non slip entry steps.
- 90° opening internally reinforced front doors.
- Water spray suppression guards and front mudflaps.
- · Laminated windscreen with shade band.
- Two speed windscreen wipers with intermittent wipe mode.
- Halogen multi-reflector headlamps incorporating turn signals. Additional door mounted integrated side indicator/cornering lamps.
- Combination brake, turn, reverse and marker lamps, registration plate illumination lamps. Extended wiring harness. Reverse alarm.
- Heated and powered exterior main mirrors with flat glass and additional independently adjustable convex "spot" mirrors.
- · Body coloured grille.
- Body coloured impact resisting polycarbonate bumper with steel backing frame.

CAB INTERIOR

- · Contoured adjustable driver's bucket seat.
- · Front passenger bench seat with 2 seat capacity.
- 3-point lap sash seatbelts in all outboard seating positions. Driver and outboard front passenger seatbelts fitted with pre-tensioner. Centre seat lap belts.
- · Driver and outboard front passenger airbag.
- With AMT: Driver's footrest.
- Door and roof pillar entry assist grips.
- Full interior trim, padded roof lining and vinyl floor covering. Driver and passenger windscreen header storage shelf.
- Tilt/Telescopic adjustable steering column, soft feel urethane steering wheel.
- Flectric windows.
- · Central locking with remote keyless entry and immobiliser.
- Twin cup holders. 24V cigarette lighter. Dashboard hook.
- Front door mounted storage pockets and driver's side ashtray.
- Fully integrated air conditioning and heater/demister with 4-speed fan and outlets for windscreen, side windows, face and floor.
- Flourescent type interior lamp with On/Door/Off switch.
- 2 DIN, two speaker multimedia unit with 6.2" LCD capacitive touch screen.
 1.6GHz processor with Android operating system. DAB+ digital radio and fully integrated Bluetooth with voice recognition. Inbuilt PDF, photo and movie viewer. Internet radio accessible via smartphone.
 32GB internal file storage. USB and auxilliary input connection provisions. Firmware and map updates possible via smartphone.
- DIN sized compartment for storage or for CB radio installation.

DRIVER CONTROLS

- Key-operated engine start/stop and steering lock. Engine idle speed control.
- Hill Assist slow/fast engagement control and on/off switch except with AMT.
- ASR and IESC on/off.
- DPD regeneration.
- With AMT: AMT slow/fast gear engagement control, 1st gear start and normal/economy gear selection modes.
- With AMT: Gear selection control with P-R-N-D and sequential shift positions.
- Left side combination stalk: Windscreen wipers, washers and exhaust brake.
- Right side combination stalk: Turn signals, headlamps, cruise control.

INSTRUMENTATION

- Electronically driven speedometer and tachometer. Digital odometer with integrated dual tripmeter. Engine coolant temperature and fuel level gauges.
- Warning lamps: Check engine, oil pressure, ABS, SRS airbag, alternator charge, service brakes, park brake, seat belt unfastened, low fuel level.
 With AMT: Check AMT.
- Indicator lamps: Hill Assist (except with AMT), warm up system, high beam, ASR, IESC, DPD status, exhaust brake, turn signals, cruise control.
 With AMT: Econo-mode, 1st gear start.
- . With AMT: Gear selection display.
- Multi information display: Shows service interval, instantaneous and average fuel consumption, DPD bar chart, hourmeter, voltmeter, time/day/ date and includes 40-120km/h adjustable vehicle speed warning.

OPTIONS AND GENUINE ACCESSORIES

Include the following (extra cost, request a brochure and further details from your Isuzu dealer):

Multimedia unit:

- Isuzu satellite navigation including 3 years of free updates.
- Supports up to five camera inputs. One low light capable digital camera and rear microphone input active when reversing. Four analogue cameras.
- Reversing sensors.
- Tyre pressure monitoring system.

. ∩thar

- Airbag compatible bullbar.
- 2,500kg rated towbar.

ISUZU CARE


Isuzu Care gives truck owners access to products and services including Roadside Assist, Service Agreements, Extended Care, Extended Isuzu Assist and the Isuzu Care Centre. Call 1800 035 640.





WEIGHTS (kg)								
Ratings* Loading Limit* (at ground)						Cab Chassis Weight #		
Models	GVM	GCM	Front	Rear	Front	Rear	Total	
NMR 60/45-150 SWB	6,000 / 4,500	9,500 / 8,000	2,360	4,480	TBC	TBC	TBC	
NMR 60/45-150 AMT SWB	6,000 / 4,500	8,000	2,360	4,480	TBC	TBC	TBC	
NMR 60/45-150 AMT MWB	6,000 / 4,500	8,000	2,360	4,480	1,475	695	2,170	

^{*}Vehicle ratings and front/rear weight limits are subject to government regulatory requirements and weight distribution analysis. Consult your Isuzu dealer to select the correct vehicle for your specific application. # Cab chassis only as supplied and including 10 litres of fuel.

DIMENSIONS (mm) Turn Circle (Turn Circle (m)				
Models	WB	OAL	FOH	ROH	EA	CE	RT	ORT	СН	FFA (unladen)	RFA (unladen)	RFH (unladen)	KERB TO KERB
NMR 60/45-150 SWB	2,490	4,735	1,100	1,145	1,805	3,172	1,425	1,860	2,170	TBC	TBC	TBC	8.5
NMR 60/45-150 MWB	3,350	6,025	1,100	1,575	2,665	4,462	1,425	1,860	2,170	635	715	755	11.5





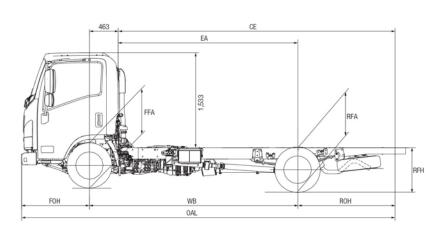

PERFORMANCE (calculated - typical paved road)							
		Geared Speed* (top gear at peak power engine RPM)	Low Speed Gradeability (lowest forward gear assuming no wheel slip)	Engine Speed (top gear at 100km/h)			
NMR 45-150	At 4,500 kg GVM	102 km/h @ 2,800 RPM	58%	2,735 RPM			
NMR 60-150	At 6,000 kg GVM	102 km/h @ 2,800 RPM	43%	2,735 RPM			
NMR 45-150 AMT	At 4,500 kg GVM	117 km/h @ 2,800 RPM	55%	2,385 RPM			
NMR 60-150 AMT	At 6,000 kg GVM	117 km/h @ 2,800 RPM	41%	2,385 RPM			

^{*}Maximum speed achievable depends on vehicle frontal area as well as other factors. Consult your Isuzu dealer for more detailed information.

ISUZU WARRANTIES					
STANDARD ¹					
New Vehicle 3 years • 100,000km • 2,000 hours					
Cab Perforation Corrosion	3 years • Unlimited km				
Isuzu Assist: 24 hour roadside assistance (3 years, unlimited km)*					
EXTENDED CARE ²					
Extended Warranty: 5 years • 250,000km • 4,500 hours					
Isuzu Assist: 24 hour roadside assistance (5 years, unlimited km)					

ORDER CODES					
Model	Code				
NMR 60/45-150 SWB	NH-NMRAA-F20				
NMR 60/45-150 AMT SWB	NH-NMRAA-X20				
NMR 60/45-150 AMT MWB	NH-NMRAA-Z20				

¹ Subject to the conditions outlined in the IAL New Vehicle Warranty, the Isuzu NMR models carry a standard factory warranty which covers the owner: (i) for the entire vehicle, for the first 36 months or 100,000 km or 2,000 hrs (whichever comes first), (ii) against cab perforation corrosion, for 36 months and unlimited kilometres. ² Extended Warranty as illustrated may be purchased to cover the owner against the failure of original components, but may exclude some components and expendable items such as oil, filters, etc. 'Valid for three years from the date of new vehicle purchases. All Issuzu warranties are subject to mandatory prescribed terms under Australian Consumer law including some raise in more detail, or alternatively contact your local dealer. All warranties commence from date of delivery.

ISUZU AUSTRALIA LIMITED ABN 97 006 962 572 ("IAL"). The information in this spec sheet was correct at time of printing, but all measurements, specifications and equipment are subject to change dardor is available at extra cost. IAL may make changes at any time without notice, in prices, colours, materials, equipment and models.

IAL makes all reasonable attempts to ensure the availability of all vehicles and equipment. The information in this spec sheet is general in nature. Your Isuzu dealer can confirm all measurements, specifications and vehicle / equipment availability upon request. To the extent permitted by the law, IAL is not liable to any person as result of reliance on the content of this spec sheet.

