

## FRR 110-260 AUTO FREIGHTPACK



Truck images shown may vary from actual model specification - Contact Isuzu for further details.

### WEIGHT RATINGS\*

**GVM** 11,000 kg  
**GCM** 20,000 kg

### ENGINE

**POWER** 191 kW @ 2,400 rpm  
**TORQUE** 761 Nm @ 1,450 - 2400 rpm

### TRANSMISSION

6 speed automatic transmission (AT)

\* Refer to back page for detailed weight rating information

| READY TO WORK                            |  |
|--|--|
| <b>STANDARD FEATURES</b>                 | 10 pallet (nominal) curtainside body                         |
|  | Easy glide curtains with quick release "Lightning" latches   |
|  | Lightweight side gates                                       |
|  | 3mm checkerplate floor and headboard with load restraints    |
|  | Safety yellow coloured body steps and grab handles           |
|  | Removable rear step facilitates tailgate loader installation |
|  | Underbody mounted storage box                                |
|  | LED lighting for body interior and access steps              |
|  | Genuine Isuzu roof mounted air deflector                     |
| Isuzu low light capable reversing camera |  |

| ISUZU CARE                         |   |
|------------------------------------|---|
| <b>WARRANTY</b>                    | 6 Year Standard Warranty                |
|                                    | 300,000 km / no hours stipulation       |
| <b>ROADSIDE ASSIST</b>             | 6 Year Roadside Support                 |
|                                    | 24/7 Unlimited km                       |
| <b>READY TO WORK BODY WARRANTY</b> | 3 Year / Unlimited km Standard Warranty |


| INTELLIGENT SAFETY   |   |              |
|--|---|--------------|
| <b>ACTIVE SAFETY</b>                                       | Anti Lock Braking System                                    | <b>(ABS)</b> |
|  | Cab Tilt Warning  | <b>(CTW)</b> |
|  | Low light capable reversing camera                          |              |
| <b>PASSIVE SAFETY CABIN OCCUPANT SAFETY SYSTEMS (COSS)</b> | Driver and front passenger airbags                          |              |
|  | Driver and front left hand passenger seatbelt pretensioners |              |
|  | ECE-R29 cab with side anti-intrusion beams                  |              |
|  | Door mounted cornering lamps                                |              |

| SERVICE AGREEMENTS                          |   |                 |       |
|---|---|-----------------|-------|
| OPTIONAL SERVICE PACKAGES                   | ESSENTIALS  | ESSENTIALS PLUS | TOTAL |
| <b>SCHEDULED SERVICINGS</b>                 | ●   | ●               | ●     |
| <b>CONSUMABLES</b>                          |   | ●               | ●     |
| <b>ENGINE, TRANSMISSION &amp; DRIVELINE</b> |   |                 | ●     |
| <b>EXTRAS</b>                               | After-hours Servicing, Glass, Fuel Card, Pickup - Dropoff |                 |       |



Subject to the conditions outlined in the IAL New Vehicle Warranty. For further information please visit [isuzu.com.au](http://isuzu.com.au) or contact your local dealer.

| ENGINE                   |  |
|--------------------------|--|
| <b>DESCRIPTION</b>       | Isuzu 6HK1-TCC   |
| <b>TYPE</b>              | 6 cylinder 24 valve SOHC   |
| <b>DISPLACEMENT</b>      | 7,790 cc   |
| <b>COMPRESSION RATIO</b> | 17.5:1   |
| <b>BORE X STROKE</b>     | 115mm x 125mm  |
| <b>POWER</b>             | 191kW (260PS) @ 2,400 RPM (DIN NET)  |
| <b>TORQUE</b>            | 761Nm @ 1,450 RPM - 2,400 RPM (DIN NET)  |
| <b>INDUCTION</b>         | Electronically controlled variable nozzle turbocharger with air-to air intercooler.            |
| <b>FUEL INJECTION</b>    | Direct injection high pressure common rail system.   |
| <b>EMISSION CONTROL</b>  | Cooled EGR with exhaust Diesel Particulate Diffuser (DPD). ADR 80/03 (Euro V / EEV) compliant. |

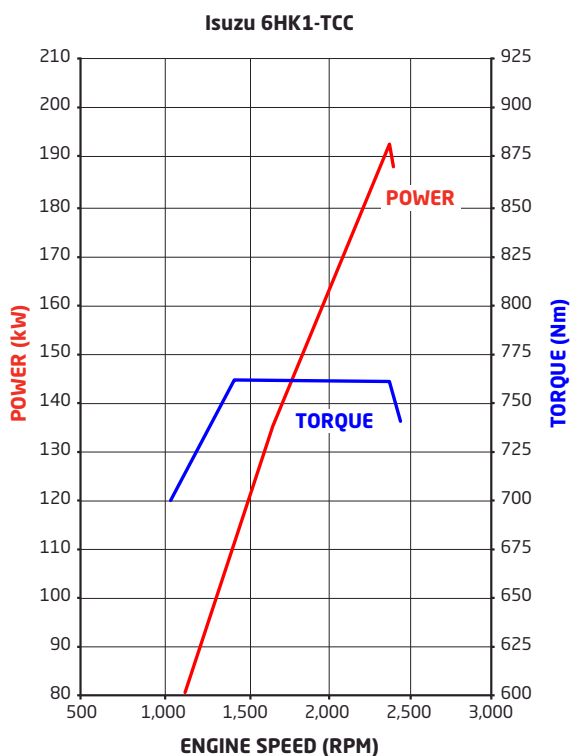

| TRANSMISSION   |                                     |
|--|-------------------------------------|
| <b>AT</b>  | <b>Description:</b> Allison LCT2500 |
|  | <b>Type:</b> 6 speed automatic      |
|  | <b>Ratios:</b>                      |
|  | <b>1st</b> 3.51                     |
|  | <b>2nd</b> 1.90                     |
| <b>3rd</b> 1.44  |                                     |
| <b>4th</b> 1.00  |                                     |
| <b>5th</b> 0.74  |                                     |
| <b>6th</b> 0.64  |                                     |
| <b>Rev</b> 5.09  |                                     |
| <b>Power Take Off facility:</b> LHS and RHS PTO openings on transmission case. Torque convertor turbine driven PTO drive gear. |                                     |
| <b>Other features:</b> Allison long life TranSynd synthetic fluid  |                                     |

| AXLES        |                                    |
|--------------|------------------------------------|
| <b>FRONT</b> | <b>Description:</b> Isuzu F041     |
|              | <b>Type:</b> Reverse Elliot I-beam |
|              | <b>Capacity:</b> 4,100 kg          |
| <b>REAR</b>  | <b>Description:</b> Isuzu R077     |
|              | <b>Type:</b> Single drive          |
|              | <b>Capacity:</b> 7,700 kg          |
|              | <b>Ratio:</b> 4.333                |

| SUSPENSION   |   |
|--------------|---|
| <b>FRONT</b> | <b>Type:</b> Single stage alloy steel taper-leaf springs                        |
|              | <b>Other features:</b> Double acting hydraulic shock absorbers. Stabiliser bar. |
| <b>REAR</b>  | <b>Type:</b> Multi-leaf main spring, multi leaf helper spring                   |

| BRAKES                        |   |
|-------------------------------|---|
| <b>TYPE</b>                   | Air over hydraulic dual circuit front and rear drum brakes. |
| <b>DIAMETER X WIDTH FRONT</b> | 320 x 120mm   |
| <b>DIAMETER X WIDTH REAR</b>  | 320 x 145mm   |
| <b>PARK BRAKE</b>             | Spring park brake acting on all rear wheels                 |
| <b>AUXILIARY BRAKE</b>        | Air controlled exhaust brake                                |

| STEERING                  |  |
|---------------------------|--|
| <b>TYPE</b>               | Power assisted recirculating ball        |
| <b>GEAR RATIO</b>         | 16.1 - 18.8:1                            |
| <b>TURNS LOCK TO LOCK</b> | 4.1                                      |
| <b>WHEEL LOCK ANGLE</b>   | 52° (inside wheel) / 39° (outside wheel) |

| WHEELS & TYRES  |  |
|---|--|
| <b>FRONT</b>  | <b>Wheels:</b> 17.5 x 6.75 six stud steel wheels               |
|   | <b>Tyres:</b> 235/75R17.5 132/130M Michelin X Multi Z Tubeless |
|   | <b>Steer axle tyre rating:</b> 4,000 kg                        |
| <b>REAR</b>   | <b>Wheels:</b> 17.5 x 6.75 six stud steel wheels               |
|   | <b>Tyres:</b> 235/75R17.5 132/130M Michelin X Multi Z Tubeless |
|   | <b>Drive axle tyre rating:</b> 7,600 kg                        |
| <b>Spare:</b> Spare wheel and tyre assembly supplied. Winch type carrier. |  |

| CHASSIS FRAME     |  |
|-------------------|--|
| <b>TYPE</b>       | Cold rivetted ladder frame with parallel side rails.                   |
| <b>MATERIAL</b>   | HT540A steel sidemembers   |
| <b>DIMENSIONS</b> | <b>Side rail (mm):</b> 225x70x6.0<br><b>Rear frame width (mm):</b> 840 |

| FUEL TANK       |                               |
|-----------------|-------------------------------|
| <b>TYPE</b>     | Frame mounted steel fuel tank |
| <b>CAPACITY</b> | 200L                          |
| <b>FUEL CAP</b> | Lockable                      |

| ELECTRICAL SYSTEM        |   |
|--------------------------|---|
| <b>TYPE</b>              | 24 volt   |
| <b>ALTERNATOR</b>        | 90 amp  |
| <b>STARTER MOTOR</b>     | 5.0 kw  |
| <b>BATTERY</b>           | 2 x 115E41L (651 CCA) batteries connected in series   |
| <b>CAN BUS PROVISION</b> | Underdash CAN system access plug for connection to a Fleet Management System (FMS) (not supplied) |

## CABIN SPECIFICATIONS & APPOINTMENTS

| CABIN GENERAL FEATURES   |  |
|--------------------------|--|
| <b>ENGINE ACCESS</b>     | Manual cab tilt to 45° with torsion bar assistance   |
| <b>STEPS</b>             | Heavy duty anti slip steps   |
| <b>DOORS</b>             | 90° opening internally reinforced front doors  |
| <b>MIRRORS</b>           | Heated and powered exterior main mirrors with flat glass and additional independantly adjustable convex "spot" mirrors |
| <b>WIPERS</b>            | Two speed windscreen wipers with intermittent wipe mode  |
| <b>EXTERIOR LIGHTING</b> | LED main beam and halogen high beam headlamp assembly with position lamp   |
|                          | Roof mounted clearance lamps   |
|                          | Front foglamps   |
| <b>AUDIBLE WARNING</b>   | Reverse alarm  |
| <b>GRILLE</b>            | Chrome   |
| <b>FRONT BUMPER</b>      | Body coloured air dam type   |
| <b>SECURITY</b>          | Central locking with remote keyless entry & immobiliser  |

| CABIN INTERIOR            |   |
|---------------------------|---|
| <b>SEATING</b>            | Isri 6860/875 NTS air suspension driver's seat  |
|                           | front passenger adjustable bucket seat and front centre seat with folding seat back.  |
| <b>SEATBELTS</b>          | 3-point lap sash seatbelts in all outboard seating positions. Driver seatbelt integrated with driver seat. Centre seat lap belts. |
| <b>STEERING COLUMN</b>    | Tilt/telescopic adjustable  |
| <b>ENTRY ASSIST GRIPS</b> | Door & roof pillar mounted  |
| <b>DOOR WINDOWS</b>       | Electric control  |
| <b>STORAGE</b>            | Overhead compartments   |
|                           | Twin cup holders  |
|                           | Centre console box & storage tray   |
|                           | Front door pockets  |
| <b>POWER OUTLET</b>       | 24V cigarette lighter   |
| <b>AIRCONDITIONING</b>    | Auto control  |
| <b>INTERIOR LIGHTING</b>  | Fluorescent lamp  |

| MYISUZU CO-PILOT AUDIO VISUAL UNIT |   |
|------------------------------------|---|
| <b>SCREEN TYPE</b>                 | 10.1" 1080p High Definition with capacitive touch   |
| <b>OPERATING SYSTEM</b>            | Android Automotive  |
| <b>NAVIGATION</b>                  | Truck tailored GPS based system + Live traffic and map content updates via smartphone link (live feed updates are provided for 3 years) |
| <b>RADIO</b>                       | AM/FM/DAB+  |
| <b>INTERNAL STORAGE CAPACITY</b>   | 32GB  |
| <b>SMARTPHONE INTEGRATION</b>      | USB 3.0 socket  |
|                                    | Wi-Fi connectivity  |
|                                    | Android Auto / Apple CarPlay compatible   |
|                                    | Phone storage pocket  |

| DRIVER CONTROLS         |   |
|-------------------------|---|
| <b>ENGINE</b>           | Idle speed control  |
|                         | cruise control  |
|                         | DPD manual regeneration switch  |
| <b>TRANSMISSION</b>     | T-bar gear selection control  |
| <b>GENERAL CONTROLS</b> | Headlamp on/off and levelling, windscreen wipers (2 speed and intermittent modes), washers, exhaust brake, turn signals |


| INSTRUMENTATION                  |  |
|----------------------------------|--|
| <b>MULTI INFORMATION DISPLAY</b> | CTW indicator  |
|                                  | Low engine oil level alert                                     |
|                                  | Vehicle systems status   |
|                                  | Low fuel level alert   |
|                                  | Fuel consumption information                                   |
|                                  | Service interval alerts  |
|                                  | Hourmeter  |
| <b>GENERAL INSTRUMENTATION</b>   | Adjustable vehicle speed warning                               |
|                                  | Speedometer & tachometer                                       |
|                                  | Digital odometer with integrated dual tripmeters               |
|                                  | Engine coolant temperature, fuel level and air pressure guages |

# FRR 110-260 AUTO FREIGHTPACK

| WEIGHTS (kg)                        |          |        |                            |       |          |       |       |
|-------------------------------------|----------|--------|----------------------------|-------|----------|-------|-------|
| MODELS                              | RATINGS* |        | LOADING LIMIT* (at ground) |       | WEIGHT # |       |       |
|                                     | GVM      | GCM    | FRONT                      | REAR  | FRONT    | REAR  | TOTAL |
| <b>FRR 110-260 AUTO FREIGHTPACK</b> | 11,000   | 20,000 | 4,000                      | 7,600 | 2,805    | 2,975 | 5,780 |

\* Vehicle ratings and front/rear weight limits are subject to government regulatory requirements and weight distribution analysis. Consult your Isuzu dealer to select the correct vehicle for your specific application.

# Vehicle as supplied and including 10 litres of fuel.

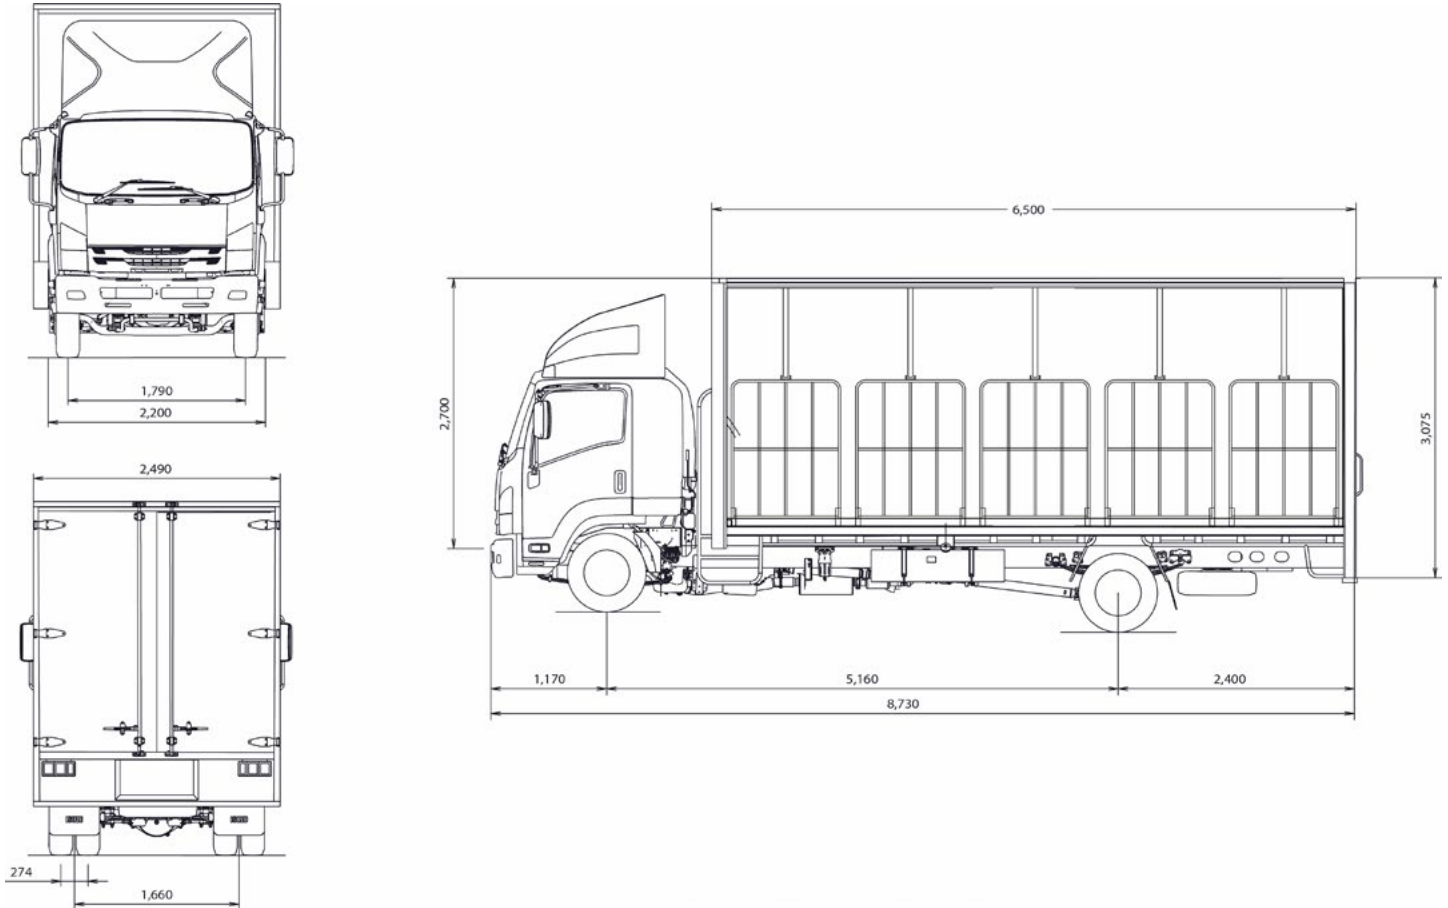

| PERFORMANCE (calculated - typical paved road) |                 |  |  |  |
|---|-----------------|--|--|--|
|   |                 | GEARED SPEED~<br>(top gear at peak power engine rpm) | LOW SPEED GRADEABILITY<br>(lowest forward gear assuming no wheel slip) | ENGINE SPEED<br>(top gear at 100 km/h) |
| <b>FRR 110-260 AUTO FREIGHTPACK</b>           | at 11,000kg GVM | 126 km/h @ 2,400 RPM                                 | 39%  | 1,900 RPM                              |

\* Maximum speed achievable depends on vehicle frontal area as well as other factors. Consult your Isuzu dealer for more detailed information.

| ORDER CODES                             |              |
|---|--------------|
| Models                                  | Codes        |
| <b>FRR 110-260 AUTO LWB FREIGHTPACK</b> | FH-FRRCG-NE2 |

Subject to the conditions outlined in the IAL New Vehicle Warranty, Isuzu F series models carry a standard factory warranty which covers the owner for the first 72 months or 300,000 kilometres, no hours stipulation. All Isuzu warranties are subject to mandatory prescribed terms under Australian Consumer Law including consumer guarantees. Harsh Conditions variations to standard factory warranty may apply. For more details visit the Isuzu website at [www.isuzu.com.au](http://www.isuzu.com.au) which explains Isuzu warranties in more detail, or alternatively contact your local Isuzu Truck dealer. All warranties commence from date of initial delivery.

ISUZU AUSTRALIA LIMITED ABN 97 006 962 572 ("IAL"). The information in this spec sheet was correct at time of printing, but all measurements, specifications and equipment are subject to change without notice. Some equipment may have been changed and/or is available at extra cost. IAL may make changes at any time without notice, in prices, colours, materials, equipment and models. IAL makes all reasonable attempts to ensure the availability of all vehicles and equipment. The information in this spec sheet is general in nature. Your Isuzu dealer can confirm all measurements, specifications and vehicle / equipment availability upon request. To the extent permitted by the law, IAL is not liable to any person as result of reliance on the content of this spec sheet.